


ME by Starck Toilet wall mounted Duravit Rimless for SensoWash® f # 2510092000

| < 375 mm > |

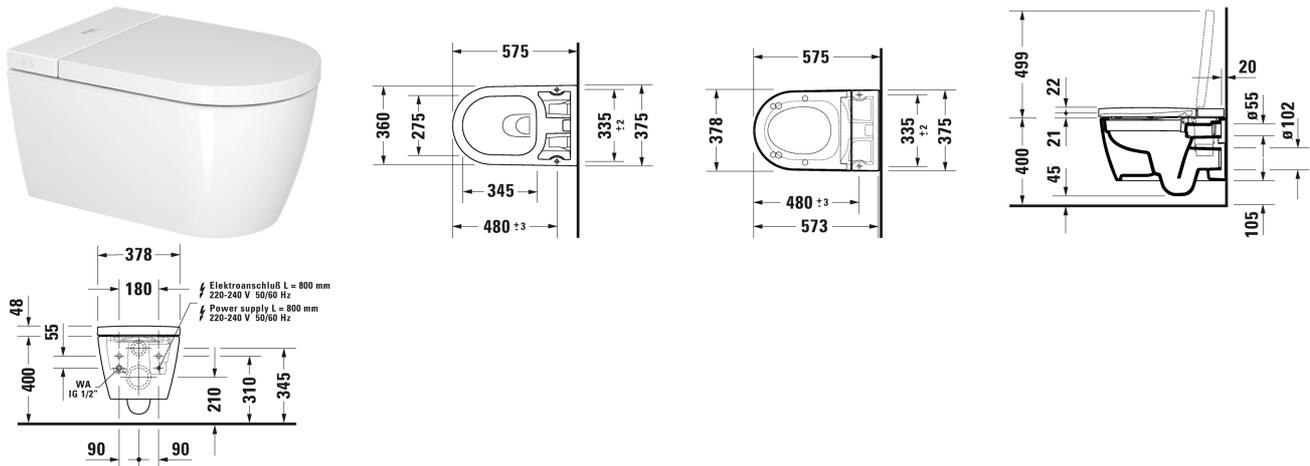

Toilet wall mounted Duravit Rimless for SensoWash® f	Dimension	Weight	Order number
rimless, washdown model, only in combination with SensoWash f			
Colors			
20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
◆ 4,5 l, UWL class 1	375 x 575 mm	25.000 kilogram	2510092000
Infobox			
Choose suitable pre-installation kit or connecting set depending on used in-wall carrier, # 005072 necessary during bare brickwork, Not available in WonderGliss			
Accessory for ceramics			
Fixing for wall mounted bidet and wall mounted toilet	Ø 12 x 180 mm	0.200 kilogram	006500
Accessory			
Noise reduction gasket			Schallschutz-Set 005090
Pre-installation kit in combination with SensoWash, for in-wall carrier with horizontal support without shower toilet pre-installation/conduit pipe			005072
Interface set in combination with SensoWash Starck f, for functional interface with DuraSystem actuator plate A2			100729
Connecting set in combination with SensoWash Starck f, for in-wall carriers with conduit pipe for connection inside the tank			100731
Suitable products			

**ME by Starck Toilet wall mounted Duravit Rimless for
SensoWash® f # 2510092000**

|< 375 mm >|

<p>SensoWash® Starck f Plus shower toilet seat Rear-, Lady- and Comfortwash, Seat heating, Warm air dryer, individual adjustment of water-, air- and seat temperature as well as spray wand position and water spray intensity, Night light, Intelligent energy saving mode, Remote control included, App operation, Self-cleaning spray wand, Descaling function, Automatic drainage in periods of prologed disuse, 378 x 574 mm</p>	<p>378 x 574 mm</p>	<p>612000</p>
<p>SensoWash® Starck f Lite shower toilet seat Rear-, Lady- and Comfortwash, Seat heating, Intelligent energy saving mode, Warm air dryer, individual adjustment of water-, air- and seat temperature as well as spray wand position and water spray intensity, Automatic drainage in periods of prologed disuse, Descaling function, Night light, Remote control included, App operation, Self-cleaning spray wand, Seat/lid material thermoplastic, 378 x 574 mm</p>	<p>378 x 574 mm</p>	<p>612001</p>

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.