



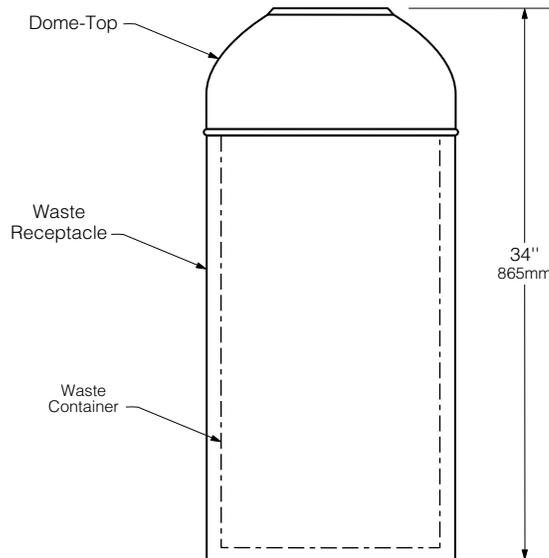

Technical Data

FLOOR-STANDING OPEN-TOP WASTE RECEPTACLE

B-2300

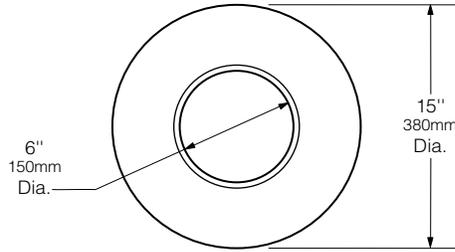

MATERIALS:

Waste Receptacle — Floor-standing cylinder with open bottom. Exposed surface has satin finish.

Dome-Top — Black cold-rolled steel. Riveted to waste receptacle. 6" (150mm) diameter opening has 1/2" (13mm) wide, contrasting metal rim that matches the finish on the waste receptacle.

Waste Container — Galvanized steel. Removable for servicing. Capacity: 15-gal. (56.8-L).

OPERATION:

Waste receptacle lifts off waste container for servicing. Wide opening provides hygienic, no-touch waste disposal.

Designer's Note: This unit is not suitable for outside use.

SPECIFICATION:

Floor-standing waste receptacle shall be stainless steel with satin finish. Waste receptacle shall have an open bottom and a black steel dome-top secured with rivets to form a single structural unit. Dome-top shall have a 6" (150mm) diameter opening has 1/2" (13mm) wide, contrasting metal rim that matches the finish on the waste receptacle. Unit shall be furnished with a removable, galvanized-steel waste container that has a capacity of 15-gal. (56.8-L). Manufacturer's service and parts manual shall be provided to the building owner/manager upon completion of project.

Floor-Standing Waste Receptacle shall be Model B-2300 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.