Carolina® One-Piece Toilet, 1.6GPF

FEATURES

- Power Gravity® flushing system, (1.6GPF/6.0LPF)
- Decorative one-piece low profile skirted toilet
- Elongated front bowl with SoftClose® seat (SS114)
- 12" UniFit rough-in
- Chrome trip lever

MODELS

 MS884114 one-piece toilet with SoftClose seat (SS114)

COLORS/FINISHES

Standard
#01 Cotton
#03 Bone
#11 Colonial White
#12 Sedona Beige
#51 Ebony





PRODUCT SPECIFICATION

The one-piece low consumption Power Gravity flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall be of skirted design, elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS884114_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others



Carolina® One-Piece Toilet, 1.6GPF

SPECIFICATIONS

1.6 GPF/6.0LPF Water Use Flush System Power Gravity® Min. Water Pressure 8 psi (static) . 10-" x 8-1/4" Water Surface

Trap Diameter 2-1/8"

Rough-in 12", (10" & 14" avail.)

Trap Seal 2-5/8"

Warranty One Year Limited Warranty

Material Vitreous china

Shipping Weight 105 lbs.


Shipping Dimensions 31-1/8" L x 18-1/8"W


x 27-1/8" H


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

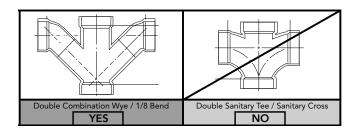

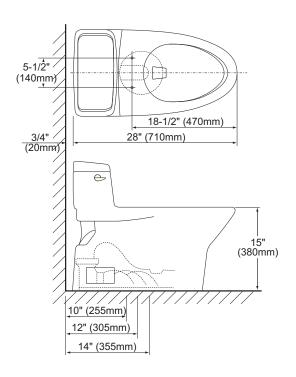





These dimensions and specifications are subject to change without notice